

WATER PUMP

CLEAN WATER SERIES & FIREFIGHTING

YUEMA


CWP150E

CLEAN WATER SERIES



**EASY
MOBILITY**

PERFORMANCE CURVE

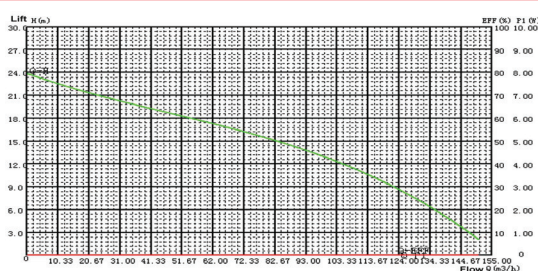

Performance Characteristics

- High delivery rate
- Rugged full frame protection with anti-vibration mounts
- Cast iron volute and impeller with a silicon carbide seal
- Complete accessories available

Key Features

- Lower oil temperature
- Power increased by 5%-8%
- High-strength frame
- Equipped with integrated wheels
- Easy to start and operate
- Lower vibration


GWP80E

FIREFIGHTING



**EASY
MOBILITY**

PERFORMANCE CURVE

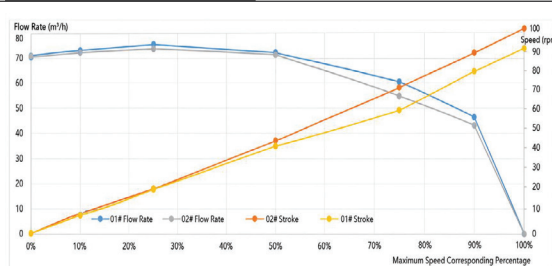

Performance Characteristics

- Supports high-pressure water supply
- Suitable for irrigation systems
- Reliable for firefighting water supply
- Designed for agricultural and plantation water supply

Key Features

- High flow capacity
- High flow capacity
- High-strength frame
- Equipped with integrated wheels
- Easy to start and operate
- Lower vibration

SPECIFICATION TABLE

MODEL	CWP150E	GWP80E
Rated Power	15 HP	25 HP
Engine	SC460	SV750
Starting system	Recoil	Electric
Displacement	459 cc	744 cc
Bore x Stroke	92x69 mm	80x74 mm
Suction port diameter	150 mm	3 inch G thread
Discharge port diameter	150 mm	3 inch G thread
Total head lift (max.)	25 m	100 m
Discharge capacity (max.)	150 m³/h	75 m³/h
Suction head	7 m	6 m
Rated speed	3600 rpm	
Fuel tank capacity	30 L	25 L
Dimensions (mm)	855 × 655 × 690	695 × 695 × 755
Net weight	107 kg	115 kg
Loading Qty. (20GP/40HQ)	60/135	160/328
Fuel type	Diesel	Gasoline



PT RODA ROLLEN INDONESIA

We Provide A COMPLETE Range Of ENGINEERING PRODUCTS

Telp. +62-21-3805880 (hunting)

HP/WA. +62-815-5888-0808



www.rodarollen.com

F044-1/2026