


Specifications of Standard and Special Spec Models

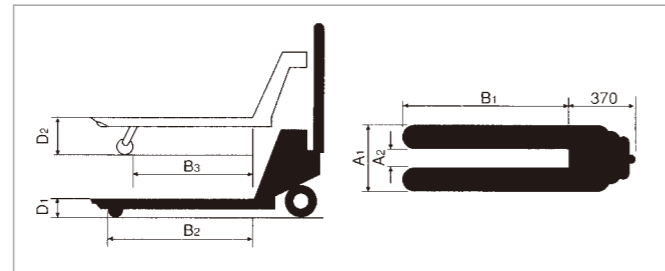

- a** Standard Model 2,000 Kgs. Capacity Fork M/M Height 80 mm
- b** Special Width Model 2,000 Kgs. Capacity Fork M/M Height 80 mm
- c** Standard Model 2,500 Kgs. Capacity Fork M/M Height 80 mm
- d** Standard Low Profile Model 1,500 & 2,500 Kgs. Capacity Fork M/M Height 65 mm
- e** 3 Ton Capacity Model 3,000 Kgs. Capacity Fork M/M Height 83 mm
- f** 50 mm Low Profile Model 1,200 Kgs. Capacity Fork M/M Height 50 mm

HAND PALLET TRUCK

Blue Label

Top selling brand made in Japan

Model	Model No.	Capacity (Kgs.)	Fork Dimension							Wheel Material	Weight (Kgs.)
			A ₁ mm	B ₁ mm	D ₁ mm	D ₂ mm	A ₂ mm	B ₂ mm	B ₃ mm		
a	BM20SS	2,000	520	810	80	200	214	675	525	V/V (N/N)	72
	BM20S			980				845	695		75
	BM20M			1,070				935	785		79
	BM20L			1,150				1,015	865		81
	BM20C			1,070				935	785		85
	BM20LL			1,220				1,085	935		88
b	BMP20-48SS	2,000	480	810	80	200	174	670	525	V/V (N/N)	71
	BMP20-48S			980				840	695		75
	BMP20-60M			1,070				935	785		82
	BMP20-60L			1,150				1,015	865		85
c	BM25SS	2,500	520	810	80	200	214	675	525	V/V (N/N)	83
	BM25S			980				845	695		86
	BM25M			1,070				935	785		89
	BM25L			1,150				1,015	865		92
	BM25C			1,070				935	785		95
	BM25F			1,150				1,015	865		98
	BM25LL			1,220				1,085	935		99
d	BM15SS-L65	1,500	520	810	65	165	214	675	545	V/V (N/N)	68
	BM15M-L65			1,070				935	805		75
	BM15LL-L65			1,220				1,085	955		83
	BM25M-L65	2,500	520	1,070			214	935	805		85
	BM25LL-L65		685	1,220			379	1,085	955		95
e	BM30M	3,000	520	1,070	83	203	214	995	740	V/V (Bogie Wheels)	105
	BM30LL		685	1,220			379	1,140	886		110
f	BM12SS-L50	1,200	520	810	50	140	214	665	555	V/V (N/N) *MC Nylon	68
	BM12M-L50			1,070				925	815		75
	BM12LL-L50			685				1,220	379		1,075

* Wheel Material.....(Steering Wheel/Fork Wheel)
Specifications are subject to change without notice.

V=Polyurethane, N=Nylon

18.08-5000AM

SUGIYASU CORPORATION

3-21, 4 Chome, Hongo-Cho, Takahama-City,
Aichi Pref, Japan 444-1394
Tel.0566-53-1862 • Fax.0566-53-1844
E-Mail sugiyasu@bishamon.co.jp http://www.bishamon.co.jp/en/

Distributed By



Bishamon Blue Label pallet trucks provide -

High Standards and experienced Engineering provide superior Quality!

Wide Range of Available Models

Bishamon original strength

Outstanding durability : Adopted "High Tensile Steel" which is very light and strong for main body frame to enhance the durability.


High durable cylinder : Top quality own made piston cylinder is capable in frequent use and also it is hard to generate oil leakage with U-packing on seal part.

Smooth maneuverability : 2 pieces of Thrust Bearing on handle axle and own developed Polyurethane Wheels make its maneuverability ultimately light and easy.



New Valuable Features

3 positions to control in operation

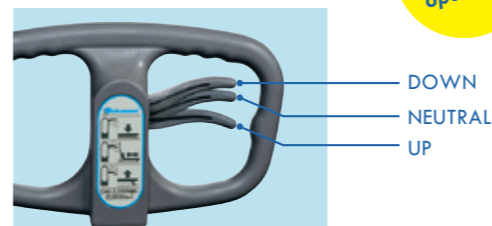

► **Comfortable Molded Grip Handle**

New molded handle design provides comfort and a strong grip.

► **3 Position Fingertip Control**

3 position Control Lever provides easy fingertip control of complete hydraulic system.

Standard Features



► **Polyurethane Wheels**

Aluminum hub steering wheels and aluminum hub fork(load) wheels are standard.

► **Lead Free Paint**

Bishamon pallet trucks are painted with environmentally friendly lead free paint.

Optional Features



► **Bogie Wheels**

Bogie Wheels are standard with Model BM30




► **Wheels**

Nylon Wheels - available with Model BM20,25 and 30 incl. low profile model (65mm&50mm) as an option.



► **Parking Brake coupling with foot guard**

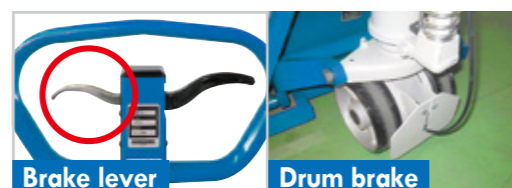

► **Braking device**

It can control the speed during driving by drum brake.


- Wide Range of Standard Models - See back page
- Super Low Profile Model - 40mm M/M Height

BM10-L40 Series



Ideal for

Vending machine
Office equipment
Thin pallet etc.



Model	Capacity (Kgs.)	A ₁ Width(mm)	B ₁ Length(mm)	D ₁ Height(mm)	D ₂ Height(mm)	A ₂ Width(mm)	B ₂ Length(mm)	B ₃ Length(mm)	Weight (Kgs.)
BM10SS-L40	1000	520	810	40	115	214	685	535	64
BM10S-L40			980				855	705	67
BM10M-L40		685	1,070			945	795	71	
BM10C-L40									379




- **Stainless Model (All stainless type 1.5ton & Partial stainless type 2.5ton and 3ton)**

BMS Series

- * Low Profile model is available
- * Mirror Finish is available

Ideal for

Food industries
Chemical industries
Applications in the refrigerator etc.



Model	Capacity (Kgs.)	A ₁ Width(mm)	B ₁ Length(mm)	D ₁ Height(mm)	D ₂ Height(mm)	A ₂ Width(mm)	B ₂ Length(mm)	B ₃ Length(mm)	Weight (Kgs.)
BMS15SS-HL	1,500	520	810	80	200	214	674	537	72
BMS15M-HL			1,070				934	794	79
BMS15LL-HL		685	1,220			379	1,084	944	88
BMS25M-HL	2,500	520	1,070			214	934	793	89
BMS25LL-HL									
BMS30M-HL	3,000	520	1,070			214	1,002	759	90
BMS30LL-HL				685	1,220				




- **High Capacity Model**

4ton & 5ton Series

Ideal for

Heavy equipment



Model	Capacity (Kgs.)	A ₁ Width(mm)	B ₁ Length(mm)	D ₁ Height(mm)	D ₂ Height(mm)	A ₂ Width(mm)	B ₂ Length(mm)	B ₃ Length(mm)	B ₄ Length(mm)	Weight (Kgs.)			
BM40M	4,000	520	1070	83	202	759	992	759	410	155			
BM40LL			1220				906	1139	906	414	175		
BM40L5		685	1500			1600	1197	1432	1284	1519	1284	414	220
BM50L4													
BM50L6	5,000	685	2000	85	205	1496	1732	1496	416	300			
BM50L7											1695	1932	1695




- **Models for 4 Way Pallet**

BMRP Series

Ideal for

Especially developed for 4 way plastic pallet.
Fits 1,100 x 1,100 pallet without dragging when pulling truck.



Model	Capacity (Kgs.)	A ₁ Width(mm)	B ₁ Length(mm)	D ₁ Height(mm)	D ₂ Height(mm)	A ₂ Width(mm)	B ₂ Length(mm)	B ₃ Length(mm)	Weight (Kgs.)
BMRP10-L50	1,000	685	1,400	50	140	380	1,255	1,150	90